

# PPA 457 All Versions

## Large Area FM Assistive Listening Systems



Features the cutting-edge PPA T45 transmitter, multiple digital audio input options, and an OLED display with easy-to-manage menu navigation. Features three powerful microprocessors and the same high-quality audio and RF performance you've come to expect from Williams Sound. With an operating range of up to 1000 feet, it's ideal for large venues where superior coverage is essential. This complete turnkey solution includes four PPA R37 receivers, each featuring seek-button channel selection with access to 17 pre-set wideband frequencies between 72-76 MHz.

Note: Optional 8-channel receivers (PPA R35-8N) are available for multi-channel applications.

### PPA 457NET PRO System includes:

- (1) PPA T45NET transmitter
  - (4) PPA R37 receivers
  - (2) NKL 001 neckloops
  - (4) EAR 013 single mini earbuds
  - (1) ANT 025 Whip Antenna
  - (1) WCA 013 Audio Cable
  - (1) TFP 048 Power Supply
  - (4) BAT 001-2 AA Alkaline Batteries
  - (1) IDP 008 Wall Plaque
  - (1) ANT 005 Coaxial Antenna
  - (1) RPK 005 Rack Panel Kit
- Network Control

### PPA 457NET System includes:

- Same as PPA 457NET PRO except:
- No ANT 005 Coaxial Antenna
  - No RPK 005 Rack Panel Kit

### PPA 457 PRO System includes:

- Same as PPA 457NET PRO except No Network Control

### PPA 457 System includes:

- Same as PPA 457NET PRO except No Network Control

# Personal PA<sup>®</sup> FM Listening System

## PPA T45NET and PPA T45 Transmitters

<b>Dimensions</b>	8.45" W x 8.25" D x 1.72"H (21.5 cm x 21 cm x 4.4 cm)
<b>Weight</b>	<b>Transmitter:</b> 3.0 lbs (1.36 kg)
	<b>Shipping Weight:</b> 4.50 lbs (2.04 kg) (Transmitter, Power Supply, Antenna and packaging)
<b>Color</b>	Black/Silver with black legends on the front, white legends on the back
<b>Rack Mount</b>	Standard 19" Rack, one EIA rack space high, 1/2 space wide 1-2 units can be mounted in a single rack space with optional RPK 005 (single) or RPK 006 (double) Rack Mount Kits
<b>Power Supply</b>	Desktop Style Transformer (TFP 048)
	Input: 100-240 VAC, 50/60 Hz. IEC Line Cord
	Output: 24 VDC, 750 mA, 18W. 2.5mm ID center positive barrel connector
	Approvals: UL, CUL, Energy Star V, CSA listed
<b>Power ON Indicator</b>	Push On/Push Off latching power button, backlit green indicates power ON, backlight off indicates power OFF, fading from bright to dark indicates Sleep Mode*
<b>Temperature Range</b>	Operating: +32° F to +104° F (0° C to 40° C)
	Storage: -4° F to +158° F (-20° C to 70° C)
<b>Menu Settings</b>	Audio Presets (Music, Voice, Hearing Assist, Custom), Frequency/Channel selection, Frequency/Channel mode, Audio Input Source (Microphone, Line, Phantom, Digital AES/EB, Digital S/PDIF), High Pass Filter, Low Pass Filter, Compression, RF Output Power, Screen Saver Delay, Test Tone (400 Hz), Headphone Volume, Headphone Source
<b>RF Section</b>	
<b>Operating Frequencies</b>	72.1-75.9 MHz , 17 wideband channels (selectable)
<b>Frequency Accuracy</b>	± 2 ppm stability, 0-50° C
<b>Deviation</b>	± 75 kHz maximum
<b>Pre-Emphasis</b>	75 µsec
<b>RF Field Strength</b>	Does not exceed 80 mV/m at 3 m
<b>Compatible Antennas</b>	ANT 005, ANT 021, ANT 024, or ANT 025
<b>Transmission Range</b>	Up to 1000 ft (304 m) with ANT 005 coaxial antenna mounted on rear chassis connector
<b>*RF Time-out (Sleep Mode)</b>	Menu selectable - 30 Min, 4 Hours, or Always On; timer starts when audio is below the -21 dB VU level and no buttons are pressed
<b>RF Power</b>	Menu selectable - Full, Medium, Low, Off
<b>RF Outputs</b>	(1x) #10-32 stud connector in center of unit (pcb mounted) (1x) F-connector on rear chassis
<b>RF Transmit Indicator</b>	1 Green LED, indicates RF "On Air"
<b>Audio Section</b>	
<b>Audio Processor Functions</b>	DSP based; Compression: 1:1, 1.5:1 or 2:1; High Pass and Low Pass Filter Frequency control
<b>Frequency Response</b>	31 – 16000 Hz, ±3 dB ("Music" Audio Preset)
<b>Signal-to-Noise Ratio</b>	≥74 dB Transmitted RF
<b>Total Harmonic Distortion</b>	Less than 0.25% @ 1 kHz (RF output)
<b>Common Mode Rejection</b>	>57 dB @ 1 kHz, Mic or Line

**NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.**

# Personal PA<sup>®</sup> FM Listening System

## PPA T45NET & PPA T45 Transmitters


<b>Audio Inputs</b>	(1x) Combination 3-pin XLR, 1/4" (TRS) jack for Mic or Line Level Analog Audio, Balanced or Unbalanced Line Level, or Microphone with Selectable Phantom Power (1x) XLR for Digital Audio, AES3/EBU, supported sample rates 44.1 kHz and 48 kHz (1x) RCA for Digital Audio, S/PDIF, supported sample rates 44.1 kHz and 48 kHz
<b>Audio Input Gain Adjust</b>	In menu, adjustable to 0 to -50 dB, in 1dB steps
<b>Phantom Power</b>	14.4 VDC applied through 2.2 kΩ resistors to analog combo jack: Pin 2 and Pin 3 on XLR jack, or tip and ring on 1/4" TRS jack
<b>Audio Level Indicators</b>	10-LED array that reads -18 to +9 dB at 3 dB intervals. 7 Green, 2 Amber, and 1 red LED. Green LEDs indicate normal operating audio level peaks, Amber LEDs indicate close to overload peaks, Red LED indicates overload peaks

Input Levels (Bal or Unbal) (at Audio Input Gain = 0dB)	Nominal (1st Amber LED)	Overload Warning (Displayed on Screen)	Absolute Maximum Ratings**
<b>Microphone</b>	-55 dBV (1.7 mV RMS)	-15 dBV (180 mV RMS)	+20dBV (10.0 V RMS)
<b>Line</b>	-25 dBV (55 mV RMS)	+16 dBV (6.3 V RMS)	+20 dBV (10.0 V RMS)

<b>Headphone Output</b>	1/4" TRS stereo jack, mono signal, 15.7 mW, maximum in 33 Ω (level adjustable in menu 0 to -40 dB in 2 dB steps)
<b>Line Output</b>	RCA jack (black), -10 dBV (.32 VRMS); Output impedance 100 Ω
<b>Ethernet</b>	RJ-45 on back of unit (PPA T45NET only) supports CAT5e cable lengths up to 328 feet (100 meters); 10/100 Base-T IEEE 802.3 compliant, unique MAC address
<b>Approvals</b>	FCC, RoHS2, WEEE, Industry Canada
<b>Warranty</b>	Lifetime PLUS Limited Warranty (90 Days on most accessories)


**NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.**

## T45 Front Panel

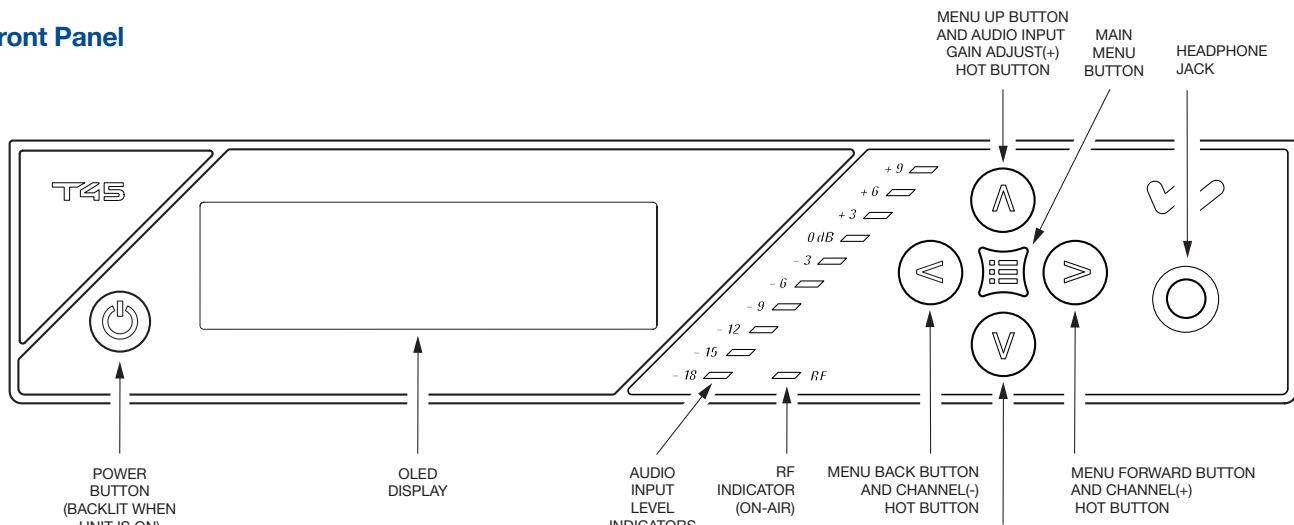


# Personal PA<sup>®</sup> FM Listening System

## T45 Rear Panel

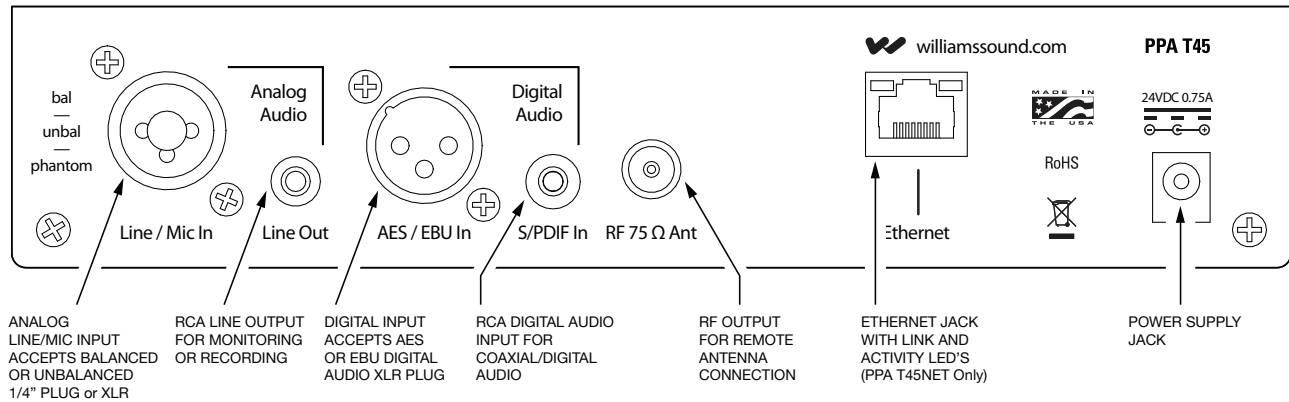

## PPA R37 Receiver:

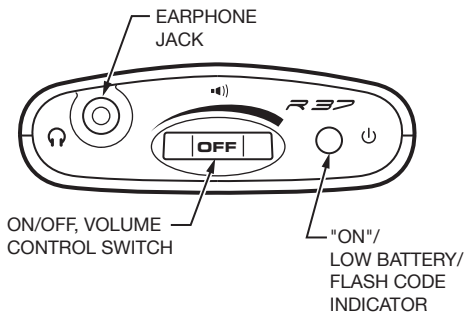

<b>Dimensions:</b>	4.1" L x 2.85" W x 1.38" D (104 mm x 72 mm x 35 mm)
<b>Weight:</b>	4.6 oz (130 g) with batteries, 2.6 oz w/o batteries (73g)
<b>Color:</b>	Black
<b>Battery Type:</b>	Two (2) AA non-rechargeable alkaline batteries (BAT 001), approx. 48 hours battery life, or Two (2) AA rechargeable NiMH batteries (BAT 026), 1600 mAh, approx 30 hours battery life
<b>Current Consumption:</b>	Nominal 52 mA
<b>Operating Freq.:</b>	17 channels: 72.1, 72.2, 72.3, 72.4, 72.5, 72.6, 72.7, 72.8, 72.9, 74.7, 75.3, 75.4, 75.5, 75.6, 75.7, 75.8 or 75.9 MHz*.
<b>FM Deviation:</b>	+75 kHz
<b>De-Emphasis:</b>	75 μS
<b>LED Indicator:</b>	Power: Bright Green. Low Battery: Flashes.
<b>Sensitivity:</b>	2 μV at 12 dB Sinad with squelch defeated
<b>Input Overload:</b>	100 mV
<b>Frequency Response:</b>	200 Hz to 15 kHz, ± 3 dB
<b>Signal-to-Noise Ratio:</b>	65 dB at 100 μV
<b>Receiver Antenna:</b>	Integral with earphone/headphone cord
<b>Audio Output:</b>	35 mW, max. 16 ohm load
<b>Output Connector:</b>	3.5 mm stereo phone jack, accepts either stereo or mono plug
<b>Approvals:</b>	FCC, Industrie Canada, RoHS, WEEE
<b>Warranty:</b>	Lifetime PLUS Limited Warranty, 90 Days on most accessories.

This device complies to "RSS-Gen Issue 2 June 2007" for Industry Canada and FCC part 15.105(b) for the United States.

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

This device complies with ICES-003 class B. Test data is available from the manufacturer on request.

**NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.**